



After installation care.

- Clean the film on a regular basis, paying special attention to the edges where dirt can build up.
- Use a microfibre cloth made especially for auto dealing on the cartical edges of the film
- Remove any smashed bugs, tree sap or others materials as soon as possible to prevent corrosive effects.
- Avoid use of abrasive powder and clay-type cleaners and degreasers, or rough spnges and paper towel.
- Don't use a power buffer on your film coat, use muscle power only
- Avoid spraying at the edge of film with a pressure washer or a hose to reduce the chances of fitting.
- To maintain the gloss and clarity of GIANT GARD PPF film, application of GIANT GARD ppf sealent recommended to be applied once in every 2 to 3 months after car washing.

Beauty Full Car

PAINT PROTECTION FILM

WARRANTY COVERAGE PERIOD

CLASSIC



PREMIUM



ULTIMATE



- 
 COST EFFECTIVE
- 
 ECO FRIENDLY
- 
 MAINTENANCE FREE
- 
 TOUGH



- ◆ ABRASIONS
- ◆ BUG ACIDS
- ◆ OILS
- ◆ BIRO DROPPINGS
- ◆ SALT
- ◆ SCRATCHING



Keep All Time New your car

Multiple layers of protection to protect you


 +91 87798 06268
 sales@giantgard.com
<https://giantgard.com/>

Office : 206, 2nd Floor, Sai Angan Apt,
 Opp. Adhiraj Complex, Nilemore Gaon,
 Nallasopara (W), Dist. Palghar - 401203



CAR PPF PROTECTION



APPLICATION OF SEALANT ON PPF

Sealant attaches to PPF at a molecular level and forms hard barrier coat by sealing pores in the film. Otherwise, these pores get filled with tiny particles from fuel smoke, various air pollutants, and grime from the roads and change the colour of the film. Other types of cleaners, polishes. Sealants may contain some of surface damaging solvents like xylene, toluene, naphtha etc which will cause the film to discolour.

METHOD FOR APPLICATION :

- ◆ Clean the dust on PPF using wet initially and later dry micro fibre towel. Through cleaning can be achieved by claying on PPF film for 10min to remove intricate dust.
- ◆ spray the sealant on PPF shaking throughly. Spread it evenly on the surface with foam or sponge.
- ◆ Remove any excess sealant from edges of film using damp microfibre cloth.
- ◆ Sealent makes the surface smooth within 10 min.
- ◆ It is recommended to apply sealent on PPF with every car wash .



Polished & Emphasizes sleek and polished appearance with its high-gloss durability and shiny result



Protects your vehicle from damage, road rash debris, bugs, climatic change and various chemicals



Ensures the vehicle paint stays fresh and looking brand new, No matter what situation it Encounters

ADVANTAGES OF USING PPF PROTECTION FILM

By applying PPF protective film to your car, you can protect the bodywork, keeping the vehicle looking new and preserving its value over time. Being transparent and having a high gloss, the PPF film enhance the beauty of the bodywork, giving the vehicle a showroom appearance. We can also apply our PPF to **cars with mate paint**, without altering the colour. For maximum results, a nanotechnological bodywork treatment can be combined, which will further enhance the film's gloss protective and hydrophobic qualities.



Paint protection film (PPF) is a thermoplastic polyurethane (TPU) film applied to the painted surface of a new or used car in order to help protect the paint from stone chips, bug splatters, and minor abrasions. PPF has been around since 1950s and has more recently become popularly known as clear bra. But where did paint protection film come from in the first place ?



- ☎ +91 87798 06268
- ✉ sales@giantgard.com
- 🌐 <https://giantgard.com/>
- 📍 Office : 206, 2nd Floor, Sai Angan Apt, Opp. Adhiraj Complex, Nilemore Gaon, Nallasopara (W), Dist. Palghar - 401203

Always take care of your car



PPF REMOVAL

- ◆ Paint protection film can be removed at any time.
- ◆ Lift a corner of the film and remove with a pulling action using a 30 to 45 degree angle with the surface.
- ◆ If the film is difficult to remove due to age or cold temperature, then a steamer can be used.
- ◆ A heat gun or hair dryer can also be used to soften the adhesive. this method may cause the adhesive to split which will require more adhesive to be cleaned off the vehicle.
- ◆ Steam softens the film and makes it easier to remove. By using this method, adhesive stays on the film during removal, and does not transfer much on the vehicle surface. it makes the vehicle cleaning easy.

WHAT IS PPF CAR PROTECTION FILM?

PPF (paint protection Film) is a transparent film with self-healing properties that is applied to the car. bodywork to protect it from scratches and a small dents. it is also known as Anti-Stone Film because it provides protection from pebbles and gravel, which can cause damage if splashed against the vehicle bodywork. Similarly, the film also provides protection from insects. The self-healing properties of the protective film allow it to self-heal by simply exposing it to the heat of the sun.





WARRANTY COVERAGE PERIOD

**e-Warranty
Protect The Protector**

CLASSIC



PREMIUM




ULTIMATE





**GiAnt
Gard**
Paint Protection Film

Bring back that
New car feeling
only with

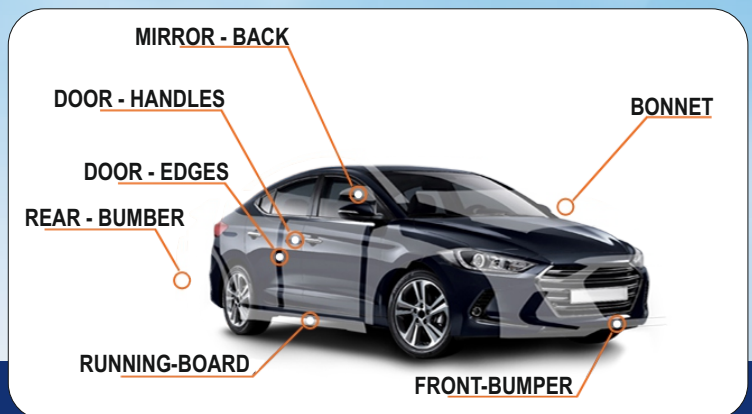

- ❖ AIN'T SHRINK OVER YEARS
- ❖ SELF HEALING EFFECT
- ❖ NO ORANGE PEEL EFFECT WAVY
- ❖ PROTECTS CAR FROM STONE CHIPS
SCRATCHES, SWIRL MARKS
- ❖ HIGH OPTICAL CLEAR AND
HIGH GLOSS FINISH
- ❖ CAN BE SAFELY REMOVED
WITHOUT RESIDUE
- ❖ DOES NOT TURN YELLOW OR BLACK
- ❖ UP TO 10 YEARS WARRANTY